


# Flanged Adapter (QF) 22007

TECHNICAL  
DATA

Ø mm	O/D mm	I/D mm	Rolled Edge (nom. mm.)	Length (nom. mm)	Weight kg	Galvanised Steel
080	79	78	6	50	0.25	0,7
100	98	97	6			
125	124	123	6			
140	139	138	6			
150	148	147	6			
160	159	158	6			
180	179	178	8			
200	200	199	8			
224	250	249	8			
250	298	297	10			
300	313	312	10			
315	348	347	10			
350	400	398	10			
400	449	447	10			
450	499	497	10			
500	559	557	10			
560	629	627	10			
630	709	707	10			
710	709	707	10			
					3.69	0,9

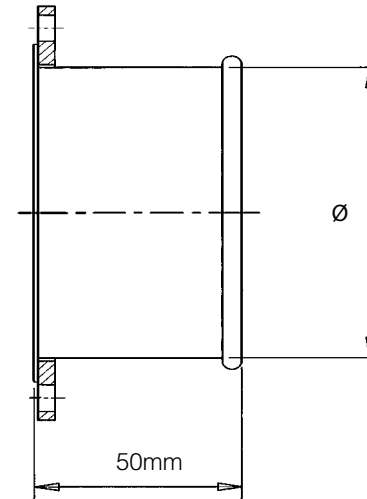

Temperature Rating of Product Components		
° C	Flanged Adapter	Sealants
200°	Galvanised Steel	Joka Seal Metal Sealant 2315
121°		
-20°		

**Additional Notes**


At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 200° C.

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Flanged Adapter	Galvanised	DX51D with Z275 Coating
Joka Seal Metal Sealant 2315	Acetone blend	AAMA Specification 801.1



# Flange 30015

Duct Ø mm	I/D mm	Pitch circle Ø mm	External Ø mm	No. of holes	Hole Dia mm	Thickness mm	Weight kg
100	103	127	143	4	10	5.0	0.3
125	128	157	178	4			0.5
140	143	172	193	6			0.5
150	153	182	203	6			0.5
160	163	192	213	6			0.6
180	179	212	229	6			0.6
200	203	232	253	6			0.7
250	253	289	313	6			1.1
300	303	337	363	6			1.2
315	317	349	377	8			1.3
350	353	387	413	8			1.4
400	404	438	464	12			1.6
450	454	488	514	12			1.8
500	504	538	564	12			2.0
560	565	600	625	12			2.2
630	635	670	695	16			2.2
710	715	750	775	16			2.5
800	804	848	884	16			4.2
900	904	948	984	16			4.7
1000	1005	1049	1085	16			5.2

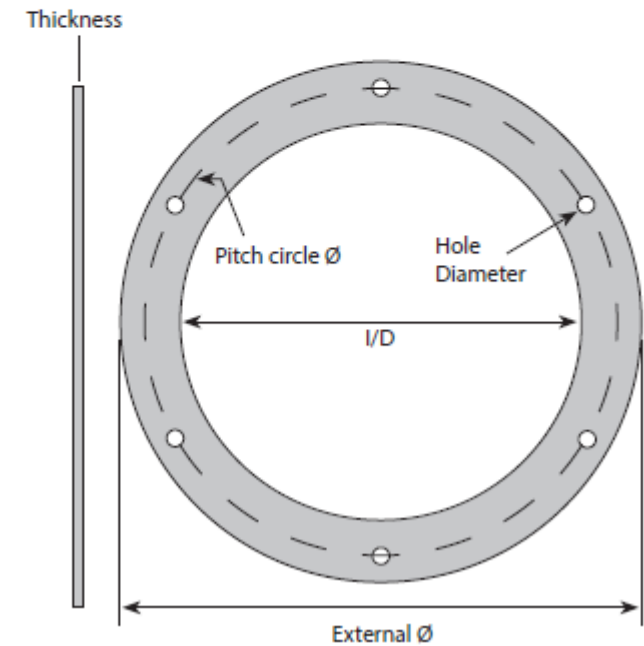

Temperature Rating of Product Components	
°C	Flange
200°	Mild Steel treated with hot-dip galvanisation
-51°	

Additional Notes
Flanges are rolled from mild steel flat bar and treated after forming

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Flange	Mild steel	DX51D with Z275 Coating