


Blast gate damper



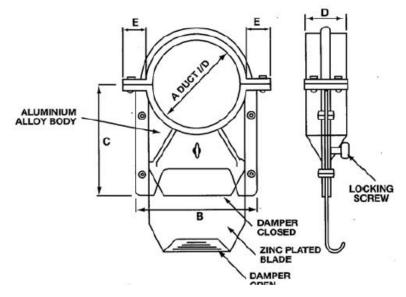

Description

The range of blast gate dampers have been designed for use primarily within the extraction and materials handling industry.

Their robust construction makes them an ideal means of controlling airflow within fume, dust and wood waste extraction systems. The simple but effective design allows the damper blade to be operated with ease and secured in position

using an integral thumb operated locking screw.

Construction

Manufactured from quality aluminum alloy the main body is of die-cast construction while the damper blade is corrosion resistant zinc plated steel.

Designed to be easily installed in a new or existing system, the damper can also be readily removed should cleaning be required. Stainless steel blades can be specified where particularly corrosive fumes are being handled. Factory fitted felt sealing strips are available as an option where a high degree of air tightness is required.

Dimensions

	Unit	Dimensions in MM				
	Size	А	В	С	D	E
	63	63	95	90	44	24
	80	80	110	105	47	25
h	100	100	135	130	50	30
	125	125	165	155	55	40
	150	150	190	175	75	40
	160	160	200	190	75	40
	180	180	215	200	75	40
	200	200	240	230	75	40
	224	224	280	250	88	40
	250	250	300	290	105	40
	280	280	325	290	108	40
	300	300	360	340	125	45
	315	315	380	350	125	45
	355	355	410	400	155	50